


F16 Mono Color LED Linear Flex

F16-24V-3528-120-CC-2200K-6500K

Specification

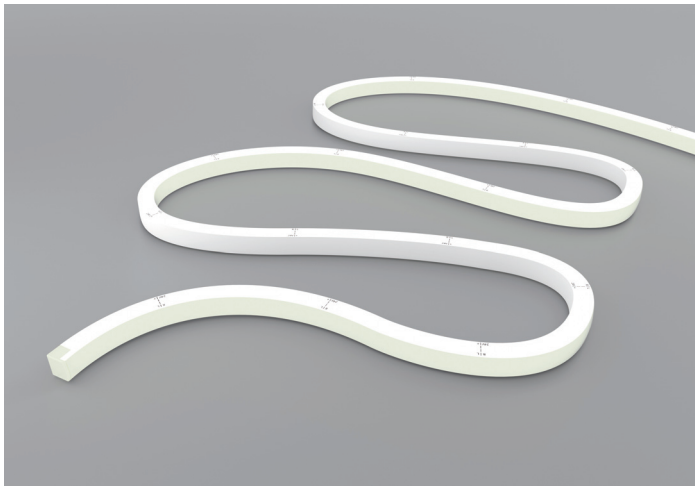

Dimension

Vertical Bending

Min. Bending Diameter

Beam Angle

Ansi C78.377

4 SDCM

One Bin

Dimmable

Submersible

Ambient Temp.

Class 3

LM-80

IK08

UV Resistant

Flame Resistant

Saltwater Resistant

Solvents Resistant

Dirt Resistant

CE

RoHS

UL Listed



Warranty

Technical Parameters


Electrical	Optional Color	Lumen Output
Input Voltage	24V DC (Built In Constant Current)	
Power Consumption	10W/m	
Physical		
LED Count	120 LEDs/m	
Cutting Unit	6 LEDs	
Cutting Unit Length	50 mm	
Minimum Bend Diameter	120mm	
Output		
LED Light	Epistar SMD LED 3528	
CRI	>80, >90	
Max Run Length*		
Single Feed	15M	
Double Feed	30 M	
Beam Angle	120°	
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C	
Temperature Ranges		
Installation	0°C to 50°C	
Operating	-25°C to 50°C	
Dependability		
Warranty	3 Years Warranty	
IP Rating	IP68 Wet location submersible <2m	

	Optional Color	Lumen Output
	2200K(2238±102K)	360lm/m
	2700K(2725±145K)	380lm/m
	3000K(3045±175K)	400lm/m
	3500K(3465±245K)	430lm/m
	4000K(3985±275K)	454lm/m
	4500K(4503±243K)	470lm/m
	5000K(5029±283K)	450lm/m
	6500K(6532±510K)	440lm/m
	Green(520-530nm)	360lm/m
	Blue (455-465nm)	43lm/m
	Pink(610-620nm)	150lm/m

Illuminance Distribution

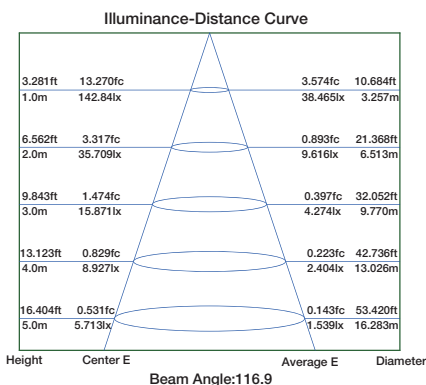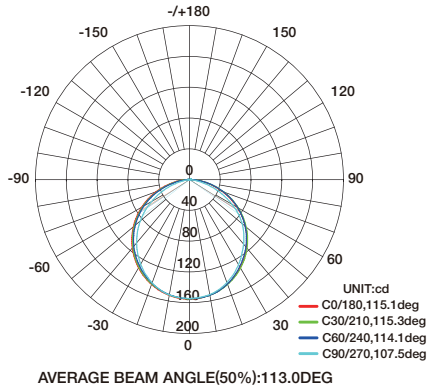


White Color Charts

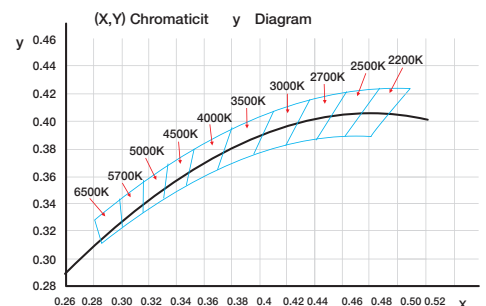

F16 Mono Color LED Linear Flex

Connection

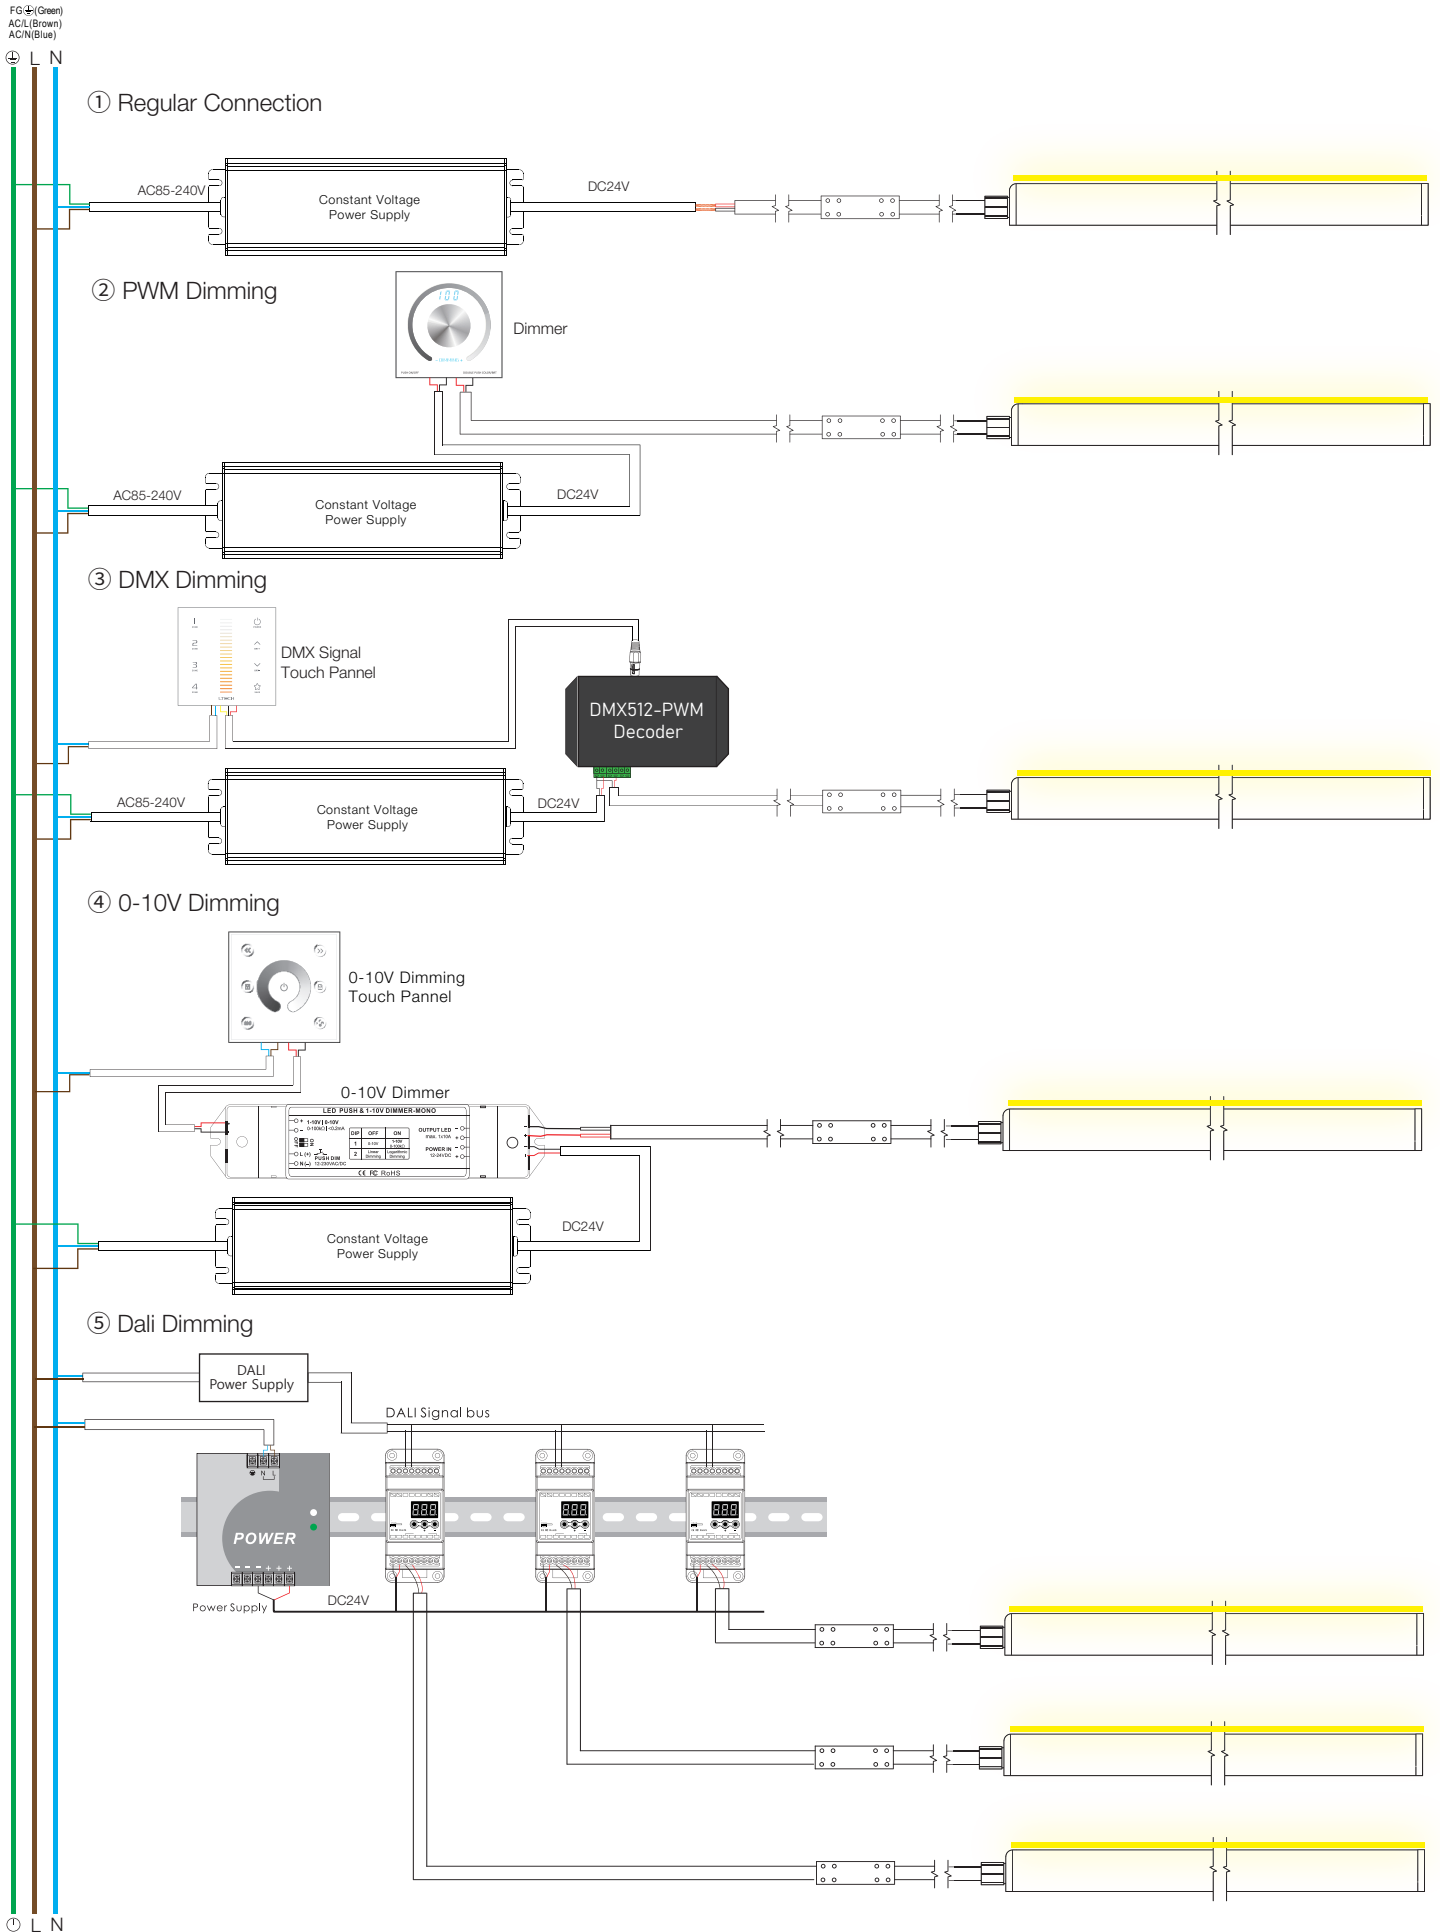

⓪ L N