
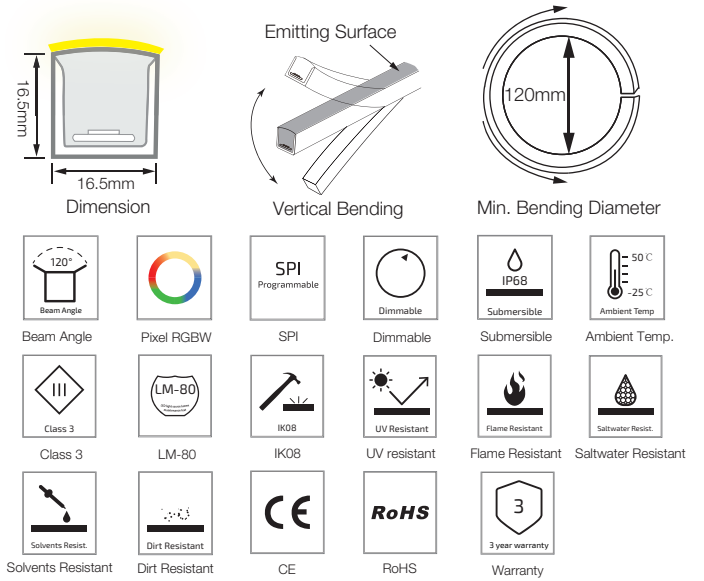


F16 SPI Pixel Chasing RGBW LED Linear Flex

F16-24V-5050-70-SPI-RGBW

Specification

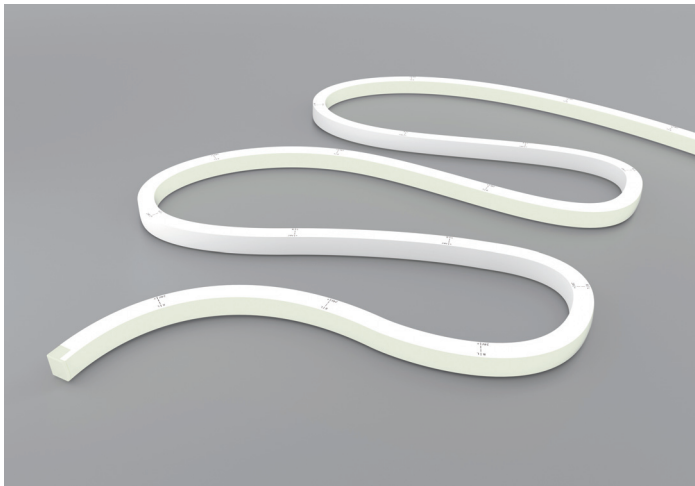


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	18W/m
Physical	
LED Count	70 LEDs/m
Cutting Unit	7 LEDs
Cutting Unit Length	100mm
Minimum Bend Diameter	120mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGBW(2700K/3000K/4000K/5000K)
Working Mode	SPI
Pixels Quantity	10 Pixels/m
IC Chips	UCS8904
Max Run Length*	
Single Feed	8M
Double Feed	16 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C

Emitting Color	Lumen Output
 Red	33lm/m
 Green	100lm/m
 Blue	21lm/m
 RGB(White)	320lm/m
 3000K	130lm/m

Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C
Dependability	
Warranty	3 Year Warranty
IP Rating	IP68 Wet location submersible <2m

Illuminance Distribution

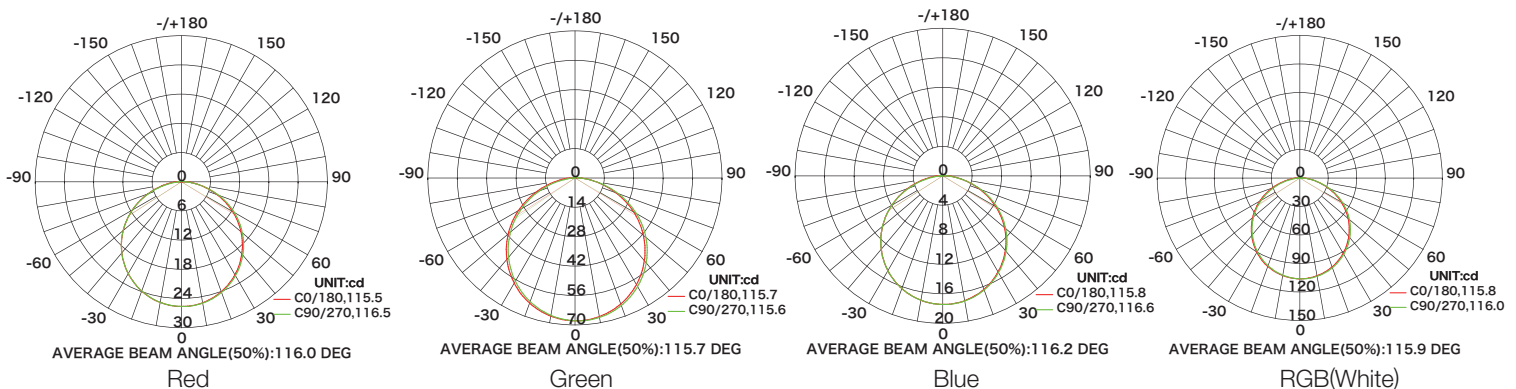

F16 SPI Pixel Chasing RGBW LED Linear Flex

