F17 Mono Color LED Linear Flex

F17-24V-2835-120-2200K-6500K

Specification

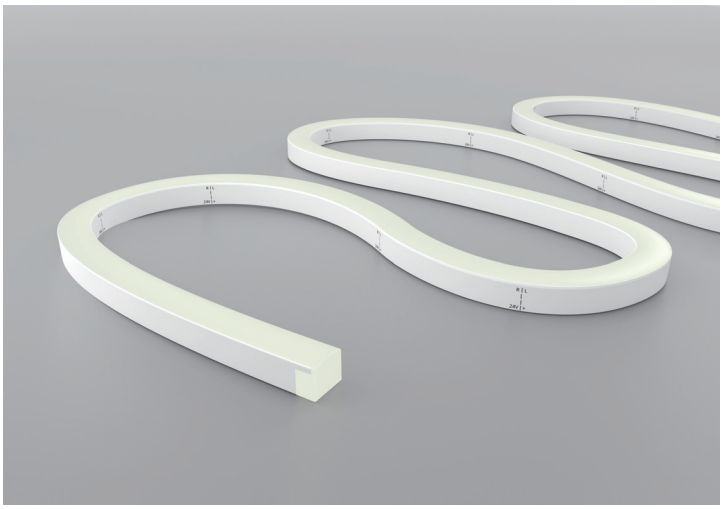



Dimension



Horizontal Bending



Min. Bending Diameter

Beam Angle

Ansi C78.377

SDCM<3

One Bin

Dimmable

Submersible

Ambient Temp.

Class 3

LM-80

IK08

UV resistant

Flame Resistant

Saltwater Resistant

Solvents Resistant

Dirt Resistant

CE

RoHS

CB

Warranty

Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	10W/m
Physical	
LED Count	120 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	100mm
Minimum Bend Diameter	150mm
Output	
LED Light	Epistar SMD LED 2835
CRI	>80, >90
Max Run Length*	
Single Feed	7 M
Double Feed	14 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C
Dependability	
Warranty	3 Years Warranty
IP Rating	IP68 Wet location submersible <2m

Optional Color	Lumen Output
2200K(2238±102K)	490lm/m
2700K(2725±145K)	496lm/m
3000K(3045±175K)	347lm/m
3500K(3465±245K)	344lm/m
4000K(3985±275K)	365lm/m
4500K(4503±243K)	350lm/m
5000K(5029±283K)	355lm/m
6500K(6532±510K)	352lm/m
Green(520-530nm)	300lm/m
Blue (455-465nm)	51lm/m
Red (620-630nm)	115lm/m

Illuminance Distribution

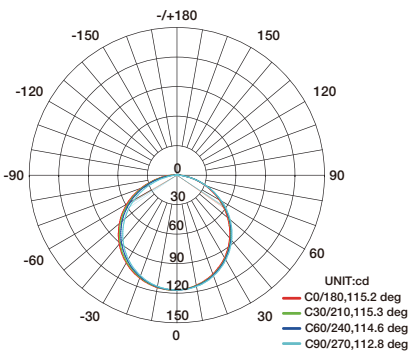

AVERAGE BEAM ANGLE(50%):114.5 DEG

Illuminance-Distance Curve

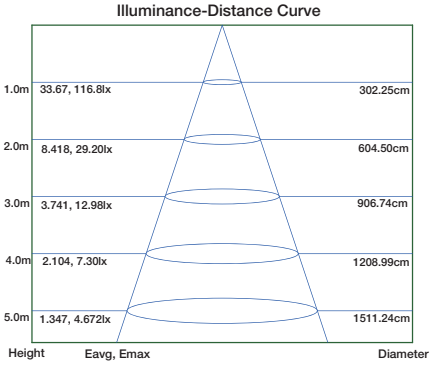

Beam Angle:108.10 DEG

White Color Charts

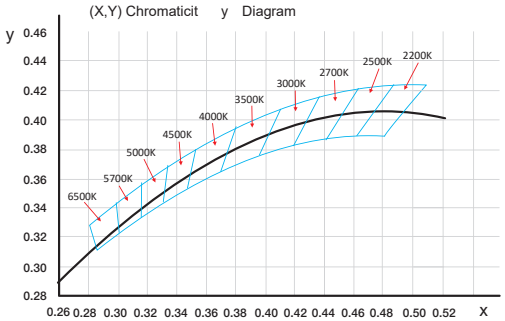

Lighting OLYMPIA

Email: info@olympialed.com
Http://www.olympialed.com

F17 Mono Color LED Linear Flex
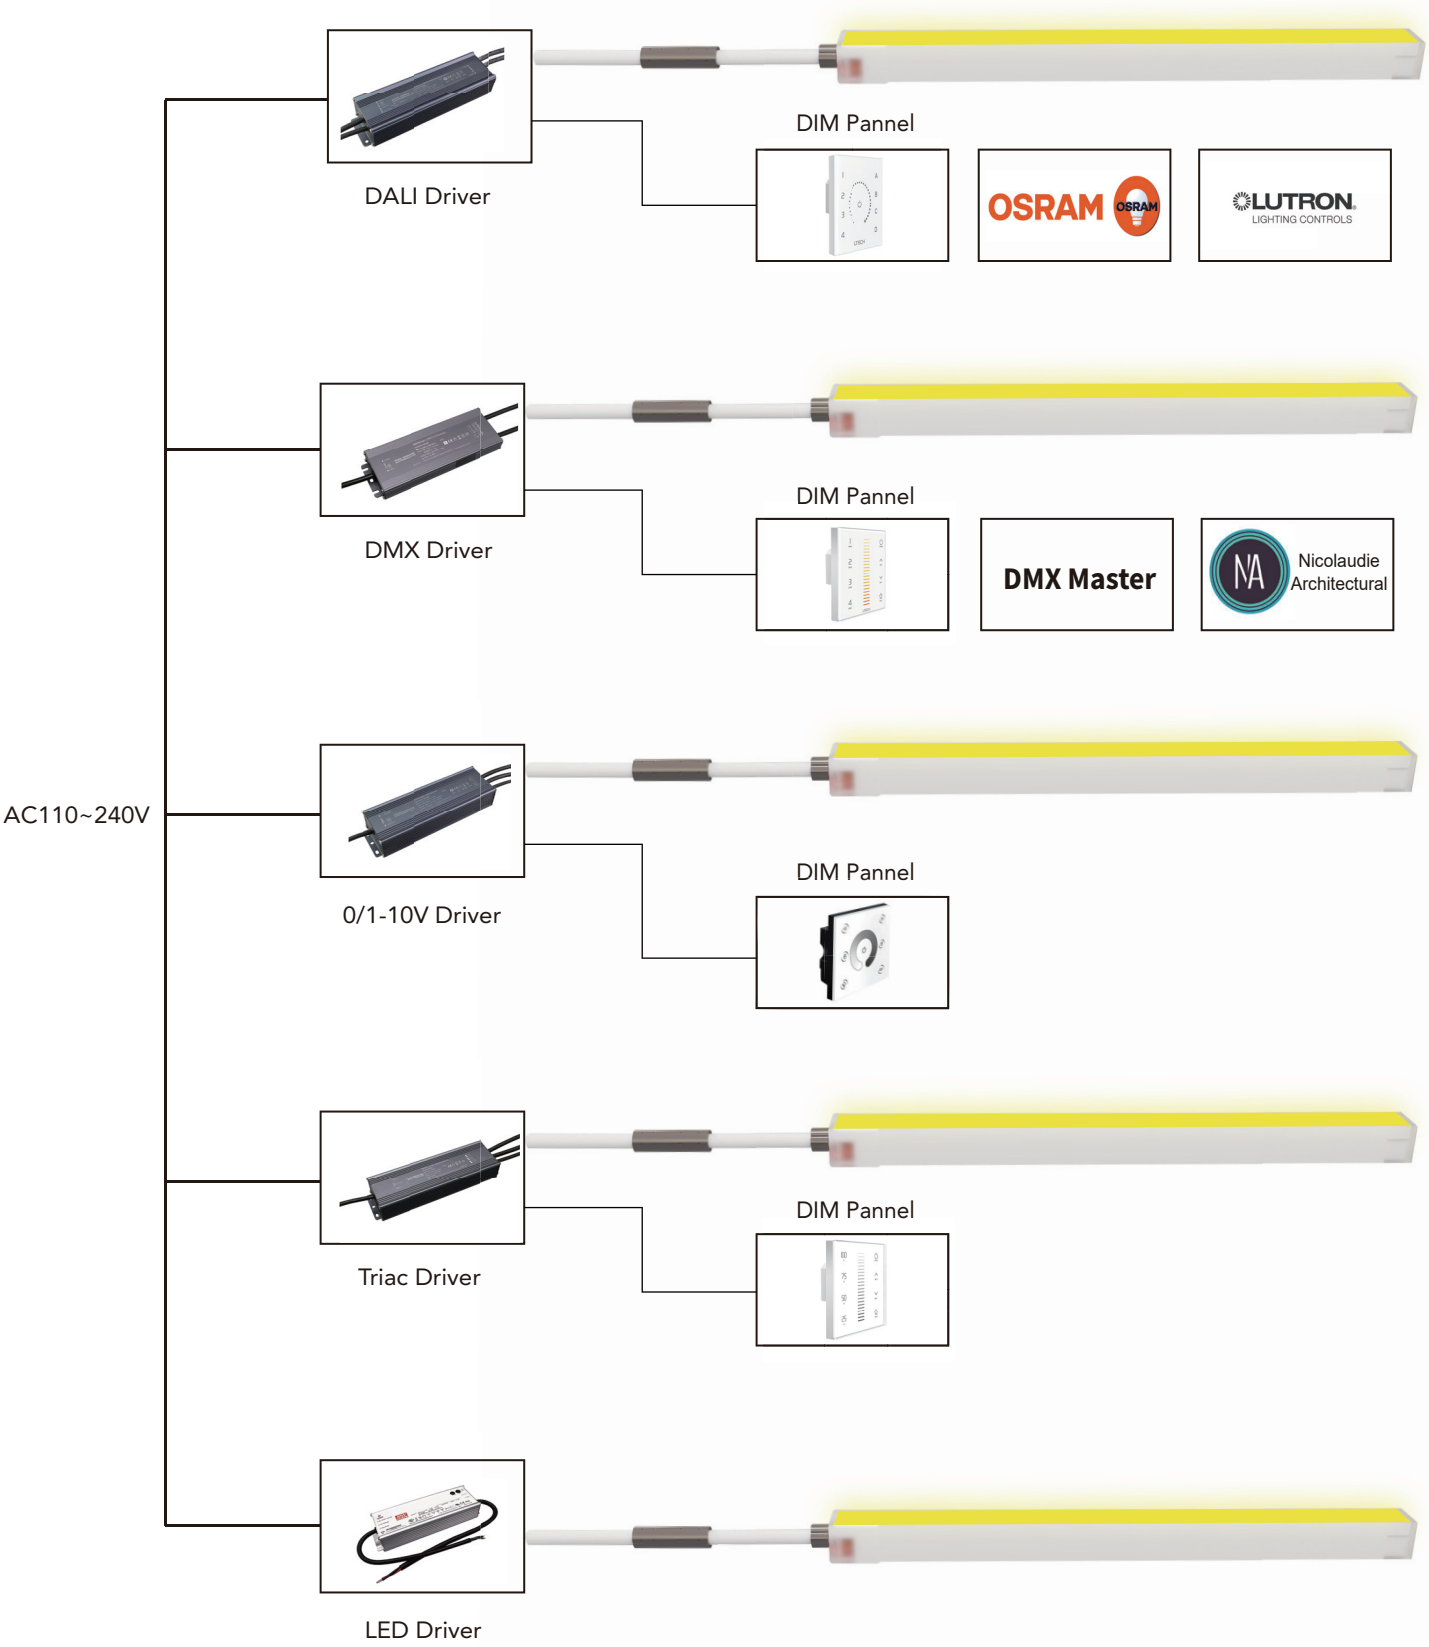
Connection