

# F21 Mono Color LED Linear Flex

F21-24V-3528-72-2200K-6500K

## Specification





## Technical Parameters


Electrical	
Input Voltage	24V DC
Power Consumption	5W/m
Physical	
LED Count	72 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	166.7mm
Minimum Bend Diameter	80mm
Output	
LED Light	Epistar SMD LED 3528
CRI	>80, >90
Max Run Length*	
Single Feed	15M
Double Feed	30 M
Beam Angle	270°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C
Dependability	
Warranty	3 Years Warranty
IP Rating	IP68 Wet location submersible <2m

Optional Color	Lumen Output
	2200K(2238±102K) 123lm/m
	2700K(2725±145K) 124lm/m
	3000K(3045±175K) 149lm/m
	3500K(3465±245K) 130lm/m
	4000K(3985±275K) 136lm/m
	4500K(4503±243K) 155lm/m
	5000K(5029±283K) 170lm/m
	6500K(6532±510K) 175lm/m
	Green(520-530nm) 115lm/m
	Blue (455-465nm) 19lm/m
	Red (620-630nm) 42lm/m
	Pink(610-620nm) 48lm/m
	Amber(585-595nm) 34lm/m
	Orange(595-605nm) 32lm/m

## Illuminance Distribution

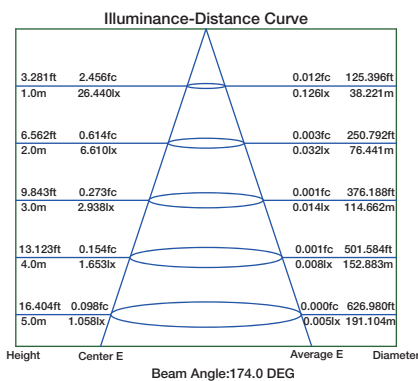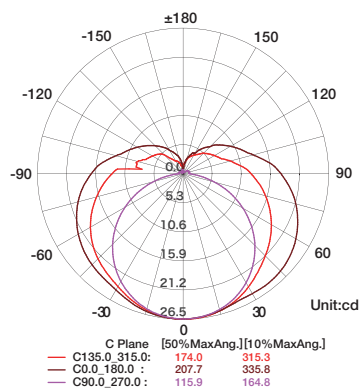

## White Color Charts

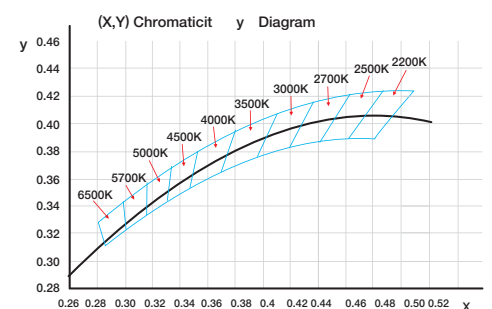

# F21 Mono Color LED Linear Flex

## Connection

