


# F21 SPI Pixel Chasing RGBW LED Linear Flex



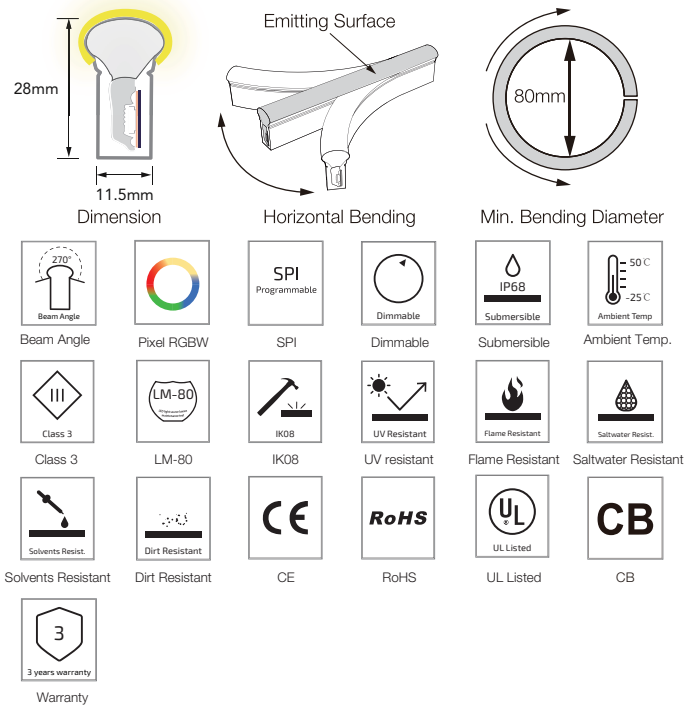


## F21-24V-5050-56-SPI4-RGBW

### Specification




### Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	15W/m
Physical	
LED Count	56 LEDs/m
Cutting Unit	7 LEDs
Cutting Unit Length	125mm
Minimum Bend Diameter	80mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGBW(2700K/3000K/4000K/5000K)
Working Mode	SPI
Pixels Quantity	8 Pixels/m
IC Chips	UCS8904
Max Run Length*	
Single Feed	8 M
Double Feed	16 M
Beam Angle	270°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C

Emitting Color	Lumen Output
	Red 27lm/m
	Green 92lm/m
	Blue 20lm/m
	RGBW 223lm/m
	3000K 98lm/m

Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C
Dependability	
Warranty	3 Years Warranty
IP Rating	IP68 Wet location submersible <2m

### Illuminance Distribution

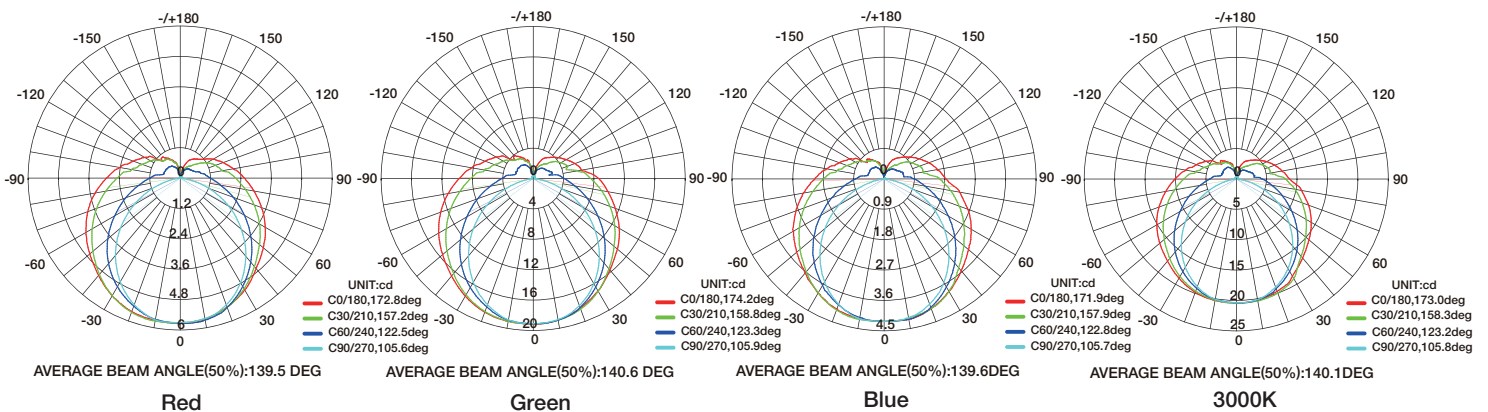

# F21 SPI Pixel Chasing RGBW LED Linear Flex

## Connection

