


# F21 Multi Color RGBW LED Linear Flex



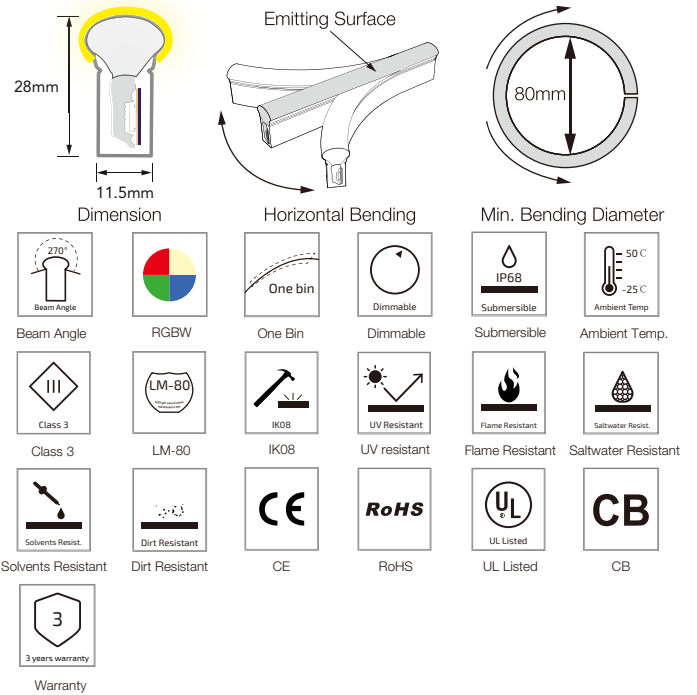


## F21-24V-5050-60-RGBW

### Specification




### Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	17W/m
Physical	
LED Count	60 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	100mm
Minimum Bend Diameter	80mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGBW(2700K/3000K/4000K/5000K)
Max Run Length*	
Single Feed	8M
Double Feed	16M
Beam Angle	270°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C
Dependability	
Warranty	3 Year Warranty
IP Rating	IP68 Wet location submersible <2m

Emitting Color	Lumen Output
	Red 27lm/m
	Green 96lm/m
	Blue 20lm/m
	RGBW 252lm/m
	3000K 125lm/m

### Illuminance Distribution

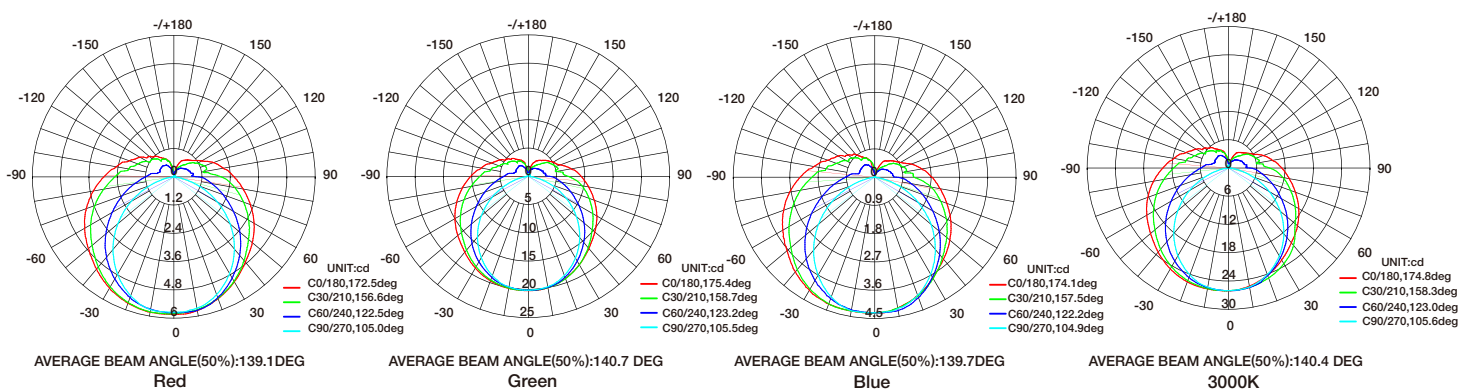

# F21 Multi Color RGBW LED Linear Flex

## Connection

