


# F21 DMX Pixel Chasing RGB LED Linear Flex

## F21-24V-5050-70-DMX3-RGB

### Specification

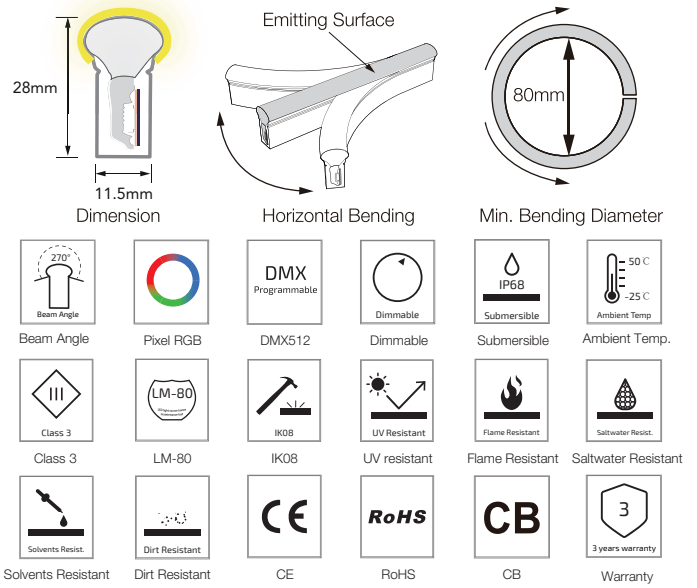


### Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	14W/m
Physical	
LED Count	70 LEDs/m
Cutting Unit	7 LEDs
Cutting Unit Length	100mm
Minimum Bend Diameter	80mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGB
Working Mode	DMX (RS485)
Pixels Quantity	10 Pixels/m
IC Chips	UCS512
Max Run Length*	
Single Feed	8 M
Double Feed	16 M
Beam Angle	270°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C

Emitting Color	Lumen Output
Red	36lm/m
Green	111lm/m
Blue	29lm/m
RGB(White)	310lm/m

Temperature Ranges	
Installation	0°C to 50°C
Operating	-25°C to 50°C
Dependability	
Warranty	3 Years Warranty
IP Rating	IP68 Wet location submersible <2m

### Illuminance Distribution

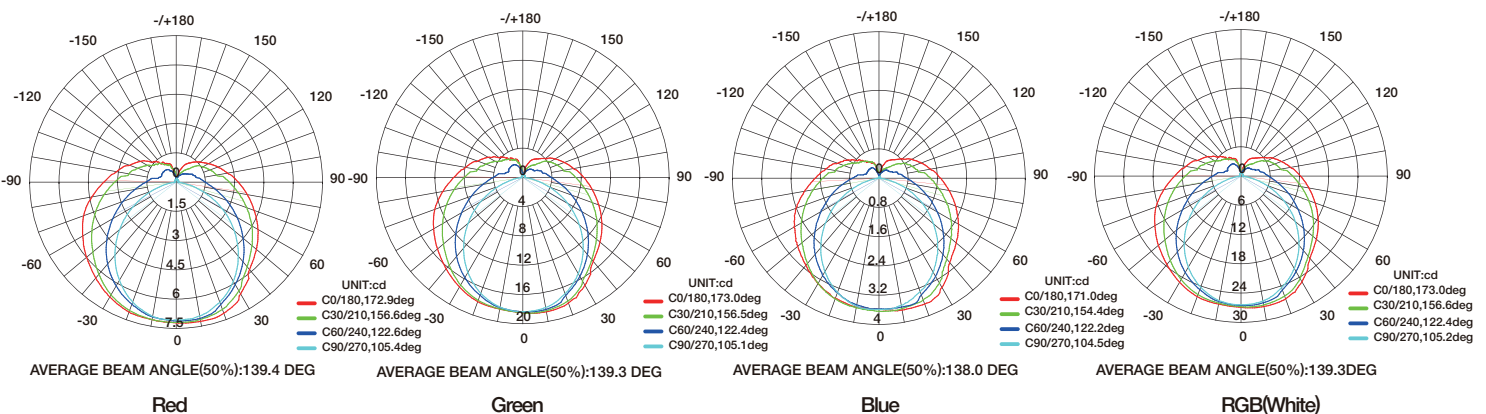

# F21 DMX Pixel Chasing RGB LED Linear Flex

## Connection

