SF31 Mono Color Silicone LED Linear Flex

SF31-24V-3528-144-2200K~6500K

Specification

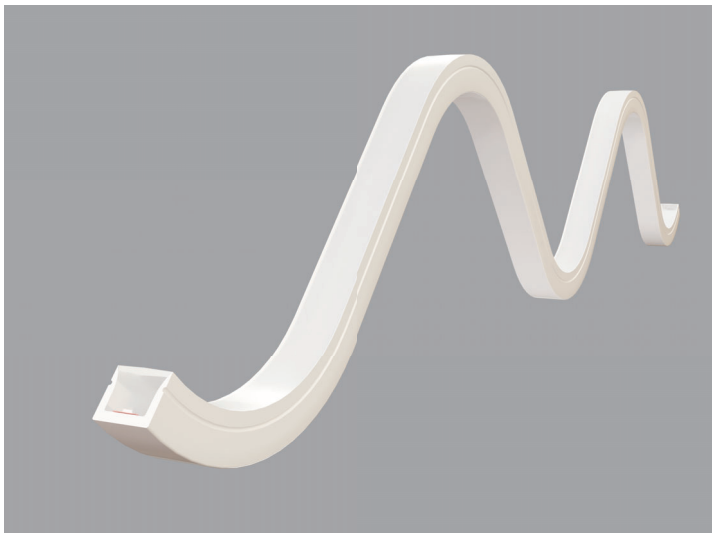



Dimension



Vertical Bending



Min. Bending Diameter

Beam Angle

Ansi C78.377

SCCM<3

One Bin

Dimmable

Submersible

Ambient Temp.

Class 3

LM-80

IK08

UV resistant

Anti-Yellowing

Flame Resistant

Saltwater Resistant

Solvents Resistant

Dirt Resistant

CE

RoHS

Warranty

Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	10W/m
Physical	
LED Count	144 LEDs/m
Cutting Unit	12 LEDs
Cutting Unit Length	83.3 mm
Minimum Bend Diameter	400mm
Output	
LED Light	Epistar SMD LED 3528
CRI	>80, >90
Max Run Length*	
Single Feed	10 M
Double Feed	20 M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68 Wet location submersible <2m

Optional Color	Lumen Output
2200K(2238±102K)	526lm/m
2500K(2460±120K)	573lm/m
2700K(2725±145K)	603lm/m
3000K(3045±175K)	688lm/m
3500K(3465±245K)	613lm/m
4000K(3985±275K)	622lm/m
4500K(4503±243K)	598lm/m
5000K(5209±283K)	610lm/m
5700K(5667±355K)	591lm/m
6500K(6532±510K)	582lm/m
Green(520-530nm)	
Blue (455-465nm)	
Lemon Yellow (570-580nm)	
Pink (610-620nm)	
Red (620-630nm)	
Amber (585-595nm)	
Orange (595-605nm)	

Illuminance Distribution

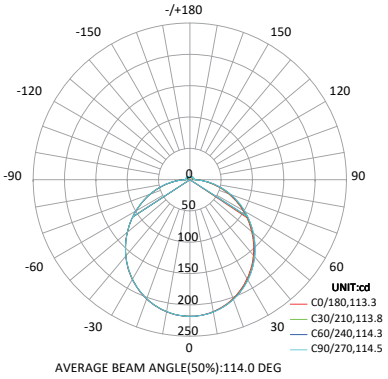

AVERAGE BEAM ANGLE(50%):114.0 DEG

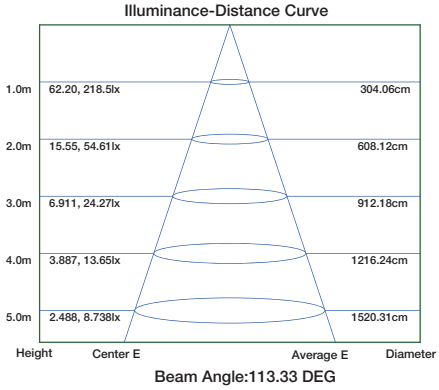

Beam Angle:113.33 DEG

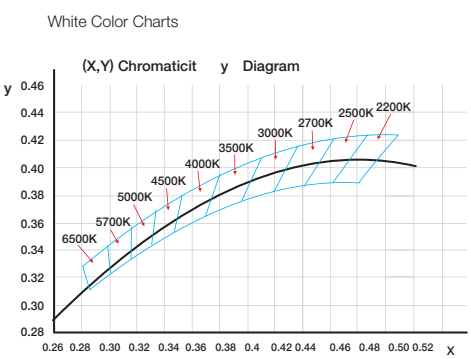

Lighting OLYMPIA

Email: info@olympialed.com
Http://www.olympialed.com

SF31 Mono Color Silicone LED Linear Flex

Connection

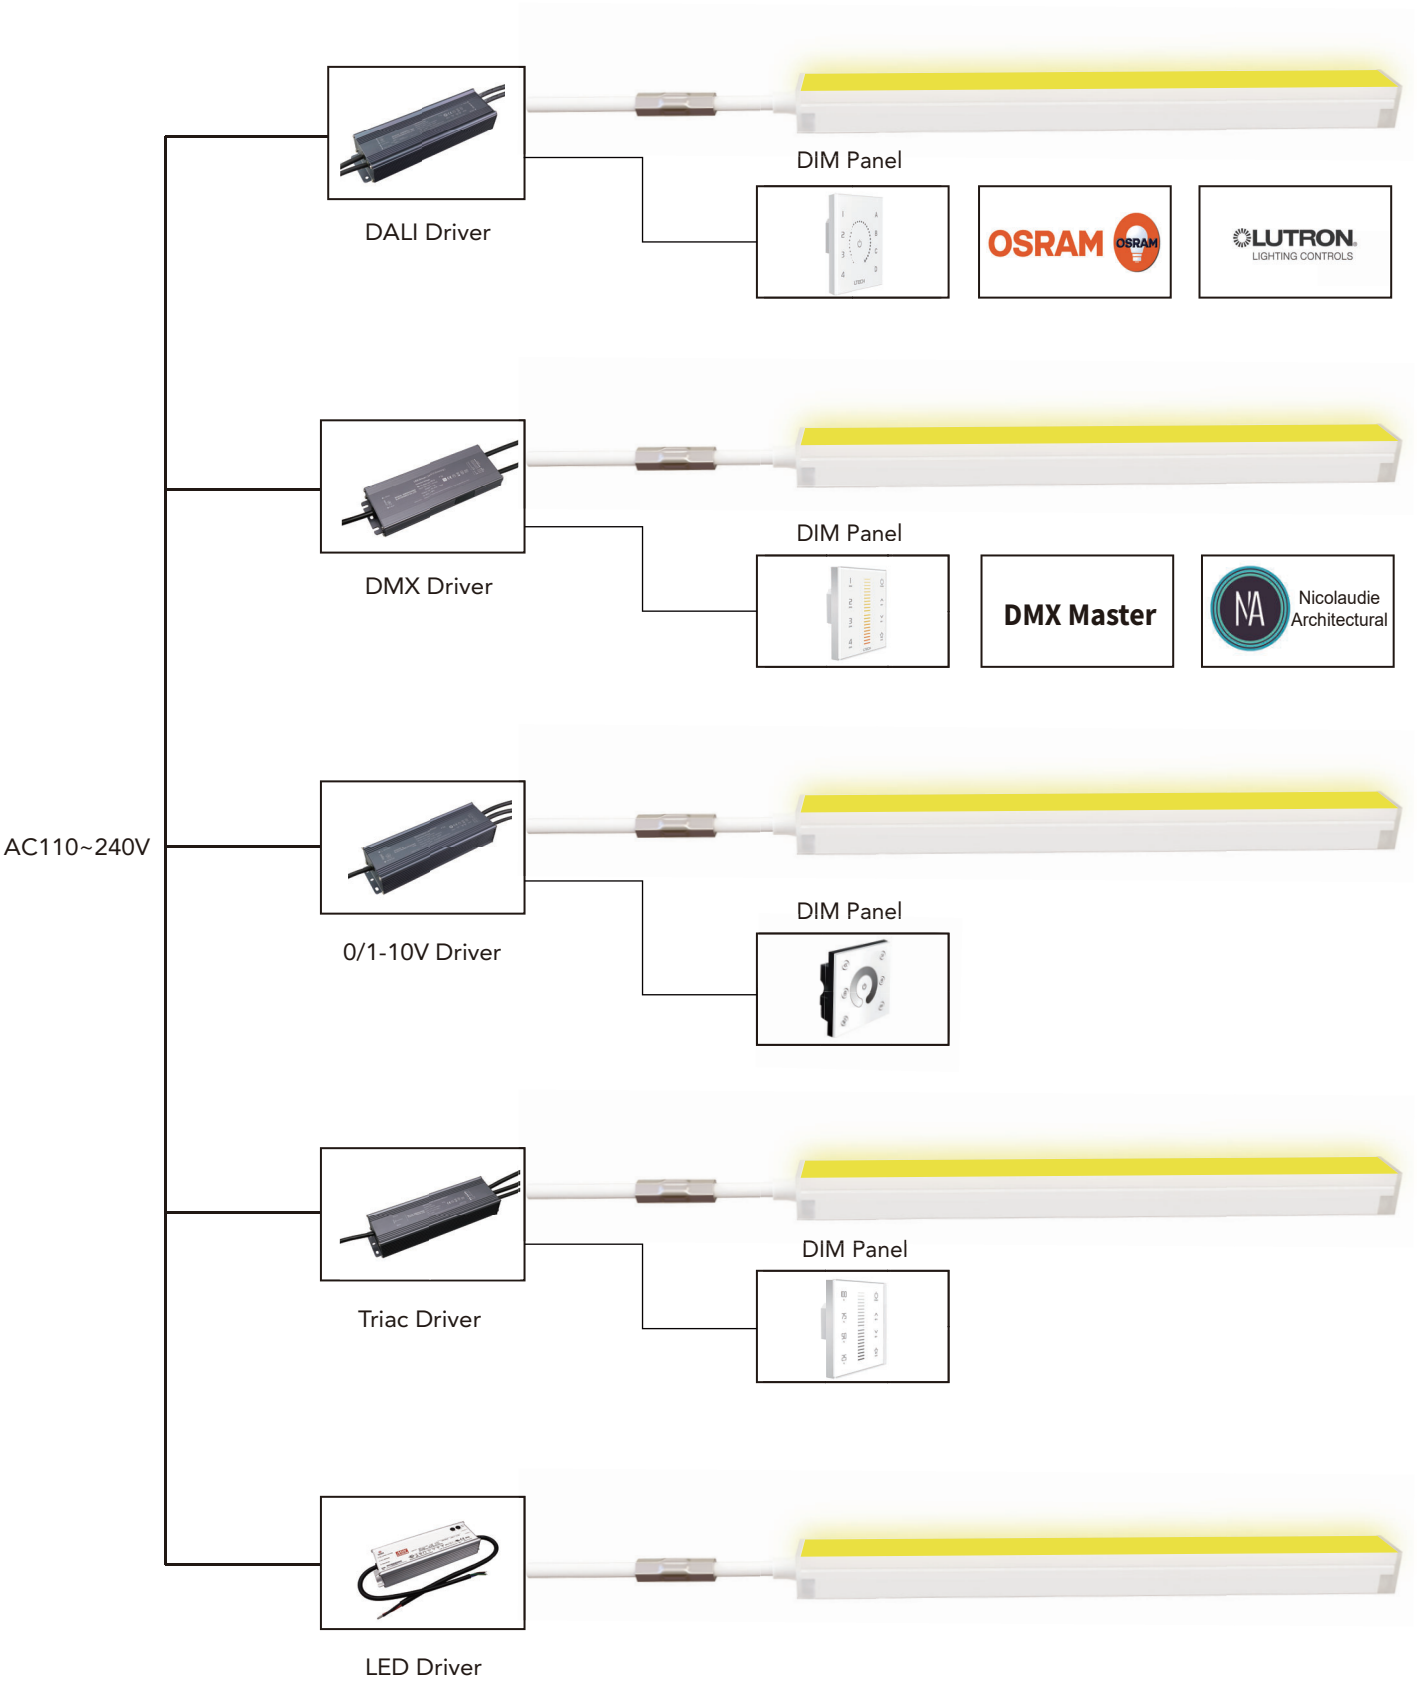

Email: info@olympialed.com
Http://www.olympialed.com

SF31 Configuration and Accessories

Mold injection Connector (IP68 Factory Assembly Only)

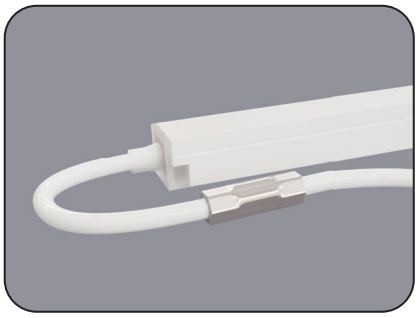

Direct Entry Connector
MJ-SF31-A-D01/02/03
MJ-SF31-A-D01SM
MJ-SF31-A-D02SF
MJ-SF31-A-D03SFM

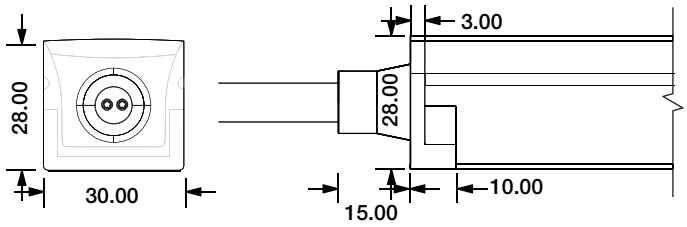

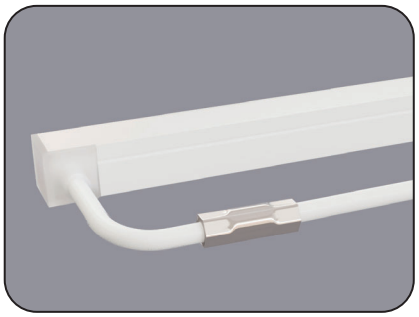

Side Entry Connector
MJ-SF31-A-S01/02/03
MJ-SF31-A-S01SM
MJ-SF31-A-S02SF
MJ-SF31-A-S03SFM

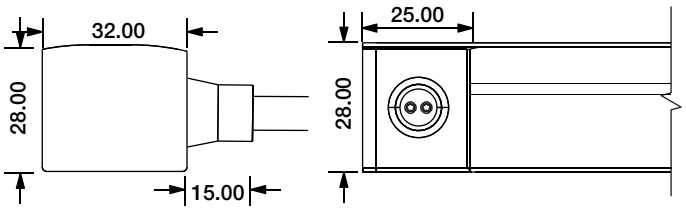

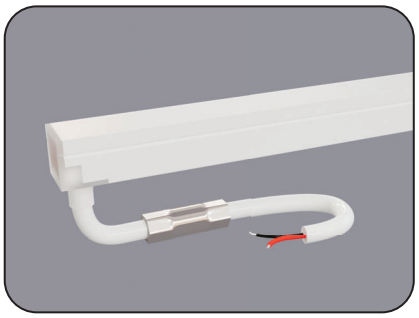

Bottom Entry Connector
MJ-SF31-A-B01/02/03
MJ-SF31-A-B01SM
MJ-SF31-A-B02SF
MJ-SF31-A-B03SFM

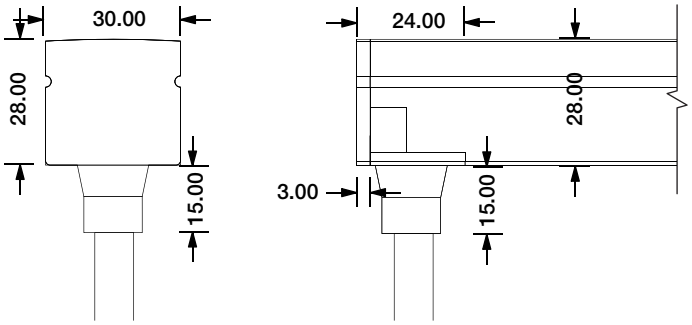

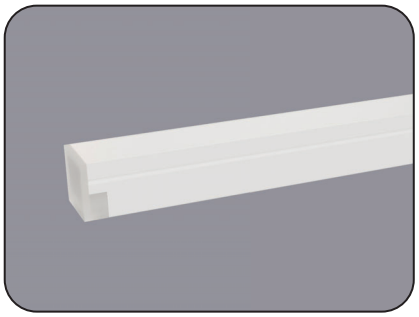

End Cap

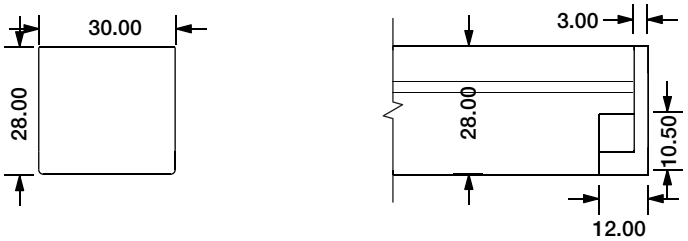

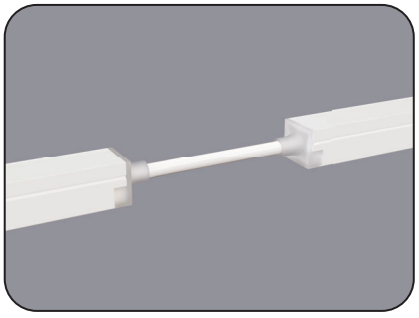

Jumper
MJ-SF31-A-D-JC

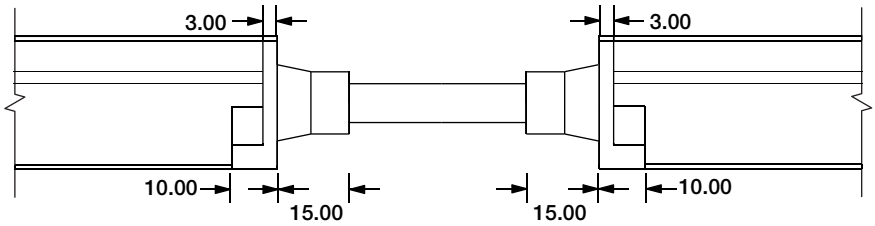

Lighting OLYMPIA
Email:/info@olympialed.com
Http://www.olympialed.com

SF31 Configuration and Accessories

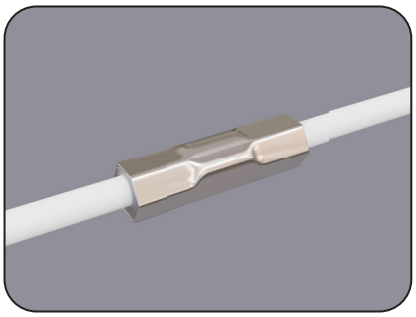

Waterproof Interrupter

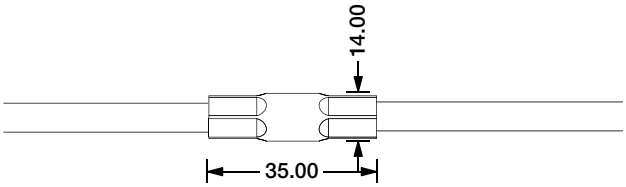

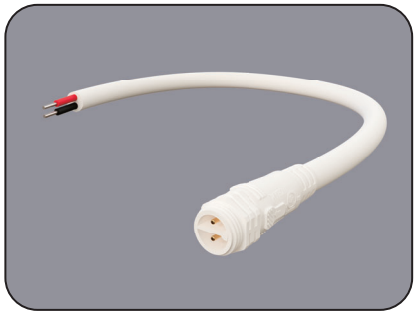

Male Connector

SQ19-M-2C-13AWG-D8-0327-S

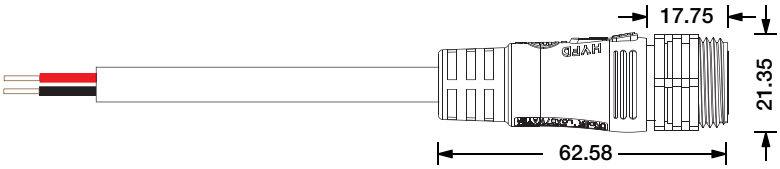

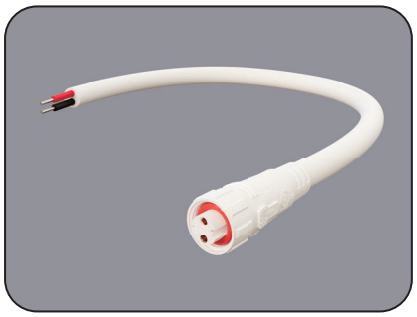

Female Connector

SQ19-F-2C-13AWG-D8-0327-S

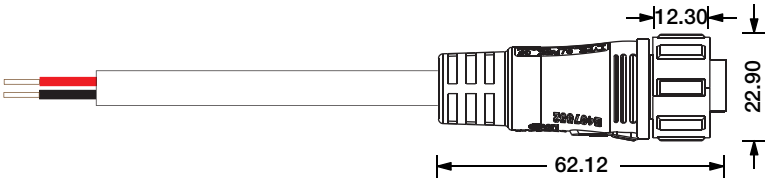

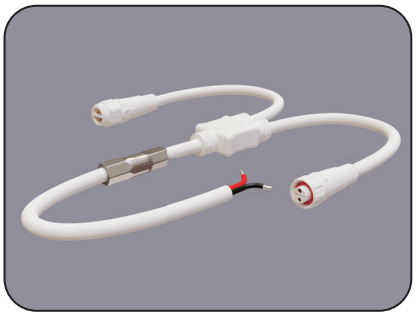

Middle Power Connector (1 to 2)

MID-CNR-A-1T2-SQ19



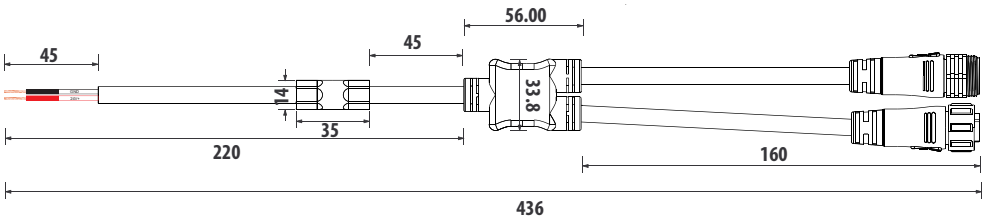

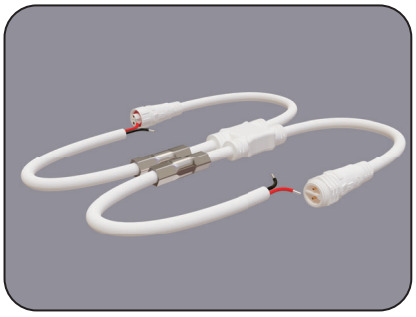

Middle Power Connector (2 to 2)

MID-CNR-A-2T2-SQ19



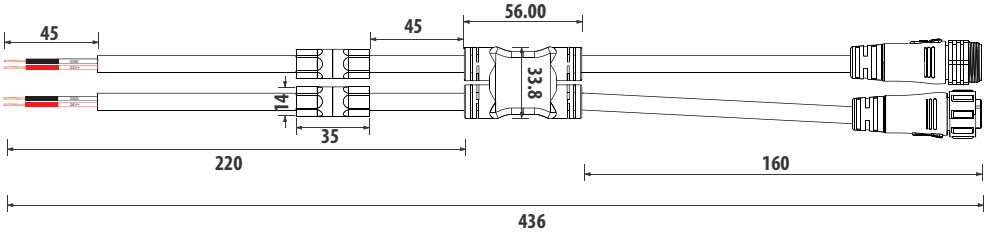

Lighting OLYMPIA

Email:/info@olympialed.com
Http://www.olympialed.com

LED Linear Flex Mounting Channel

1. Aluminum Channel

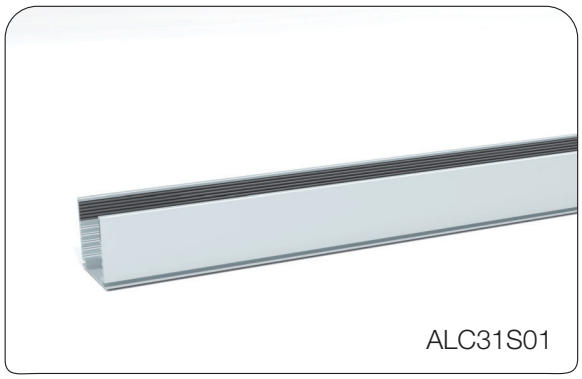

Dimension

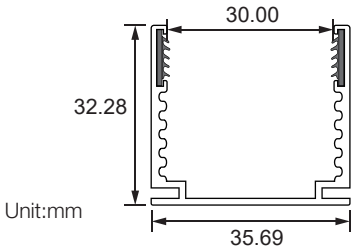

Unit:mm

Installation Way

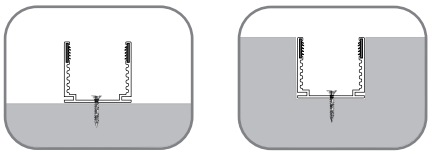

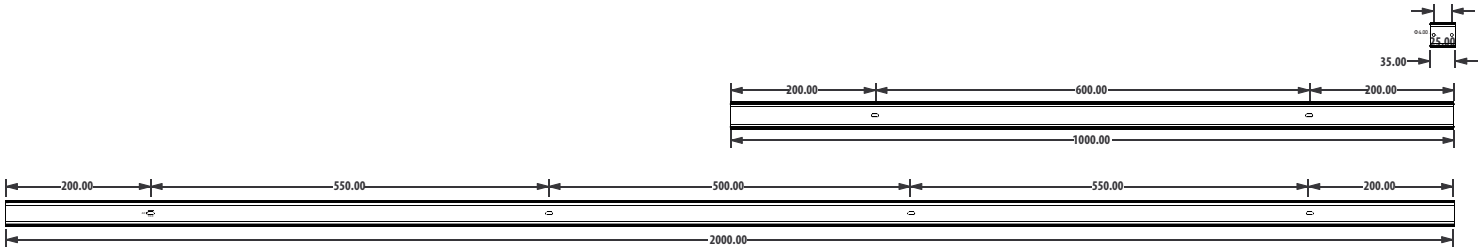

Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALC31S01-035	35.69*32.28	35mm	Φ4.0mm	2	SF31
ALC31S01-100		1000mm	⬭4.0mm	2	SF31
ALC31S01-200		2000mm	⬭4.0mm	4	SF31

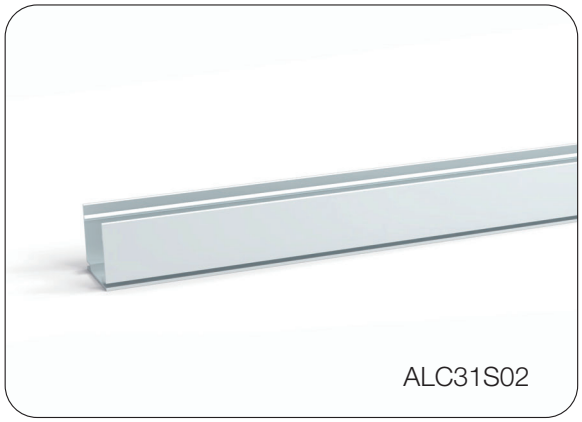

Dimension



Unit:mm

Installation Way

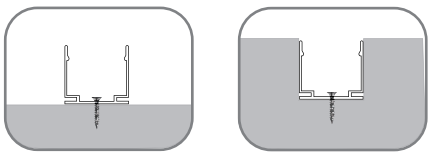

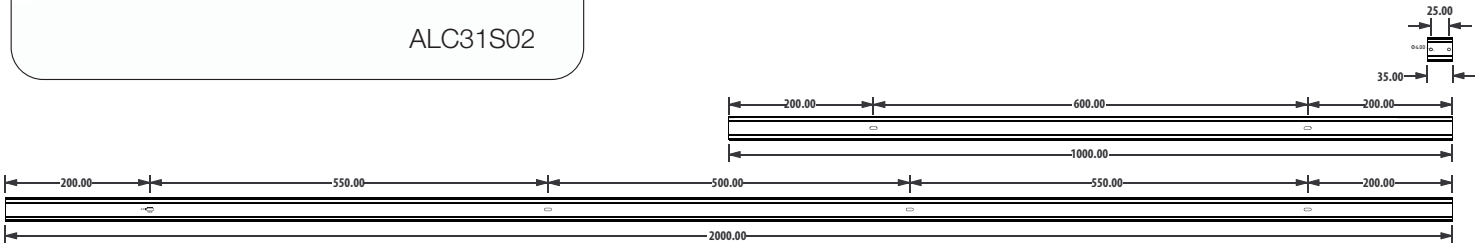

Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALC31S02-035	32.98*30.28	35mm	Φ4.0mm	2	SF31
ALC31S02-100		1000mm	⬭4.0mm	2	SF31
ALC31S02-200		2000mm	⬭4.0mm	4	SF31

Lighting OLYMPIA

Email: info@olympialed.com
Http://www.olympialed.com

LED Linear Flex Mounting Channel

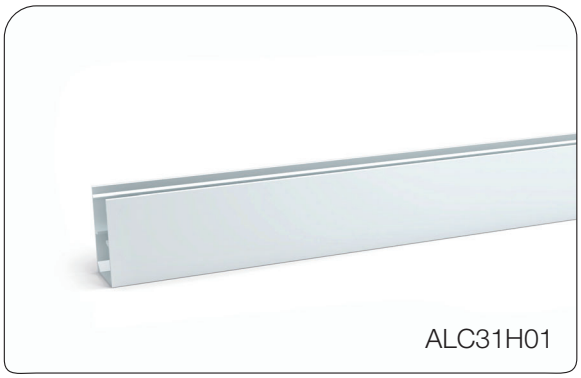

Dimension

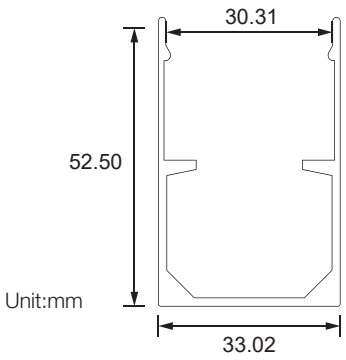

Installation Way

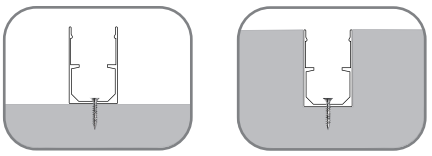

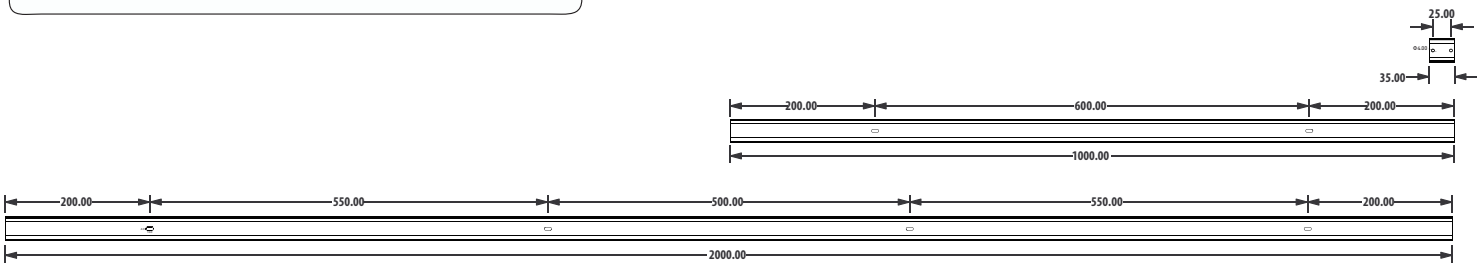

Model	W x H(mm)	Standard Length	Screw Holes	Holes Numbers	Suitable Product
ALC31H01-035	33.02*52.50	35mm	Φ4.0mm	2	SF31
ALC31H01-100		1000mm	⬭4.0mm	2	SF31
ALC31H01-200		2000mm	⬭4.0mm	4	SF31

2. Flexible Aluminum Channel

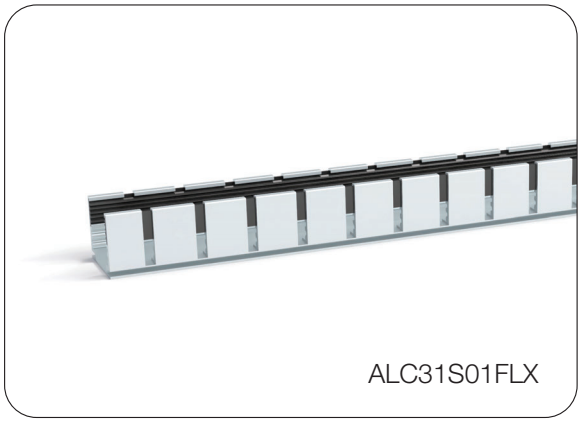

Dimension

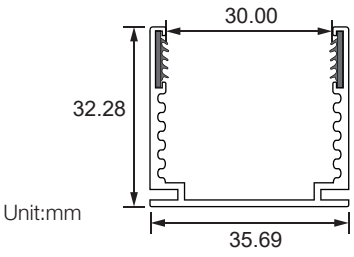

Installation Way

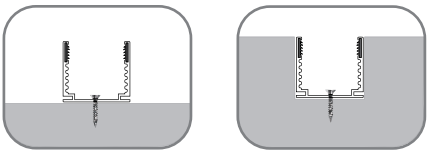

Topview



Model	W x H(mm)	Standard Length	Suitable Product
ALC31S01FLX-05	35.69*32.28	500mm	SF31
ALC31S01FLX-10		1000mm	SF31

Lighting OLYMPIA

Email: info@olympialed.com
Http://www.olympialed.com

Product Packing Details

Custom : Carton (White Box+Plastic Plate Inside)

Product	Packing 1				Packing 2			
	Packing 1 Max. Length	Quantity (Plate)	Carton Size	Gross Weight	Packing 2 Max. Length	Quantity (Plate)	Carton Size	Gross Weight
F15/SF15	5m	1	41*41*5cm	2.5kg	10m	1	57*48*6cm	5.0kg
		4	41*41*19cm	10.6kg		5	57*48*19cm	25.0kg
F16/SF16	5m	1	41*41*5cm	2.5kg	10m	1	63*53*6cm	5.0kg
		4	41*41*19cm	10.0kg		3	63*53*16cm	15.0kg
SF17	5m	1	41*41*5cm	2.5kg	10m	1	63*53*6cm	5.0kg
		4	41*41*19cm	10.6kg		3	63*53*16cm	15.0kg
SF18	5m	1	41*41*5cm	2.5kg	10m	1	63*53*6cm	5.0kg
		4	41*41*19cm	10.6kg		3	63*53*16cm	15.0kg
F21/SF21	5m	1	41*41*5cm	3.1kg	10m	1	63*53*6cm	6.2kg
		4	41*41*19cm	13.0kg		3	63*53*16cm	18.6kg
SP01	10m	1	41*41*5cm	2.6kg	20m	1	57*48*6cm	5.0kg
		4	41*41*19cm	11.0kg		5	57*48*19cm	25.0kg
SP05	10m	1	41*41*5cm	2.4kg	20m	1	57*48*6cm	3.6kg
		4	41*41*19cm	9.6kg		5	57*48*19cm	18.0kg
SF05	10m	1	41*41*5cm	2.0kg	20m	1	57*48*6cm	4.0kg
		4	41*41*19cm	8.0kg		5	57*48*19cm	20.0kg
SF06	7m	1	41*41*5cm	2.3kg	14m	1	57*48*6cm	4.4kg
		4	41*41*19cm	9.2kg		5	57*48*19cm	22.0kg
SF08	7m	1	41*41*5cm	2.3kg	14m	1	57*48*6cm	4.4kg
		4	41*41*19cm	9.2kg		5	57*48*19cm	22.0kg
SF09	9m	1	41*41*5cm	2.0kg	18m	1	57*48*6cm	3.9kg
		4	41*41*19cm	8.0kg		5	57*48*19cm	19.5kg
SF10	5m	1	41*41*5cm	2.3kg	10m	1	57*48*6cm	4.2kg
		4	41*41*19cm	9.2kg		5	57*48*19cm	21.0kg
SF24	5m	1	57*48*6cm	2.3kg	10m	1	63*53*6cm	4.2kg
		4	57*48*19cm	9.2kg		5	63*53*16cm	21.0kg
SF33	3m	1	63*53*6cm	3.4kg	10m	1	85*73*6cm	11.5kg
		3	63*53*16cm	10.2kg		2	85*73*11cm	23.0kg
SF34	3m	1	63*53*6cm	3.2kg	10m	1	85*73*6cm	11.0kg
		3	63*53*16cm	9.6kg		2	85*73*11cm	22.0kg
SF31	8.5m	1	85*73*6cm	12.8kg				
		2	85*73*11cm	24.4kg				
SF41	8.5m	1	85*73*6cm	11.9kg				
		2	85*73*11cm	22.7kg				