






SFW20 Mono Color Silicone Flexible LED Wall Grazer

SFW20-24V-3535-24-CC-2200K-6500K


Specification

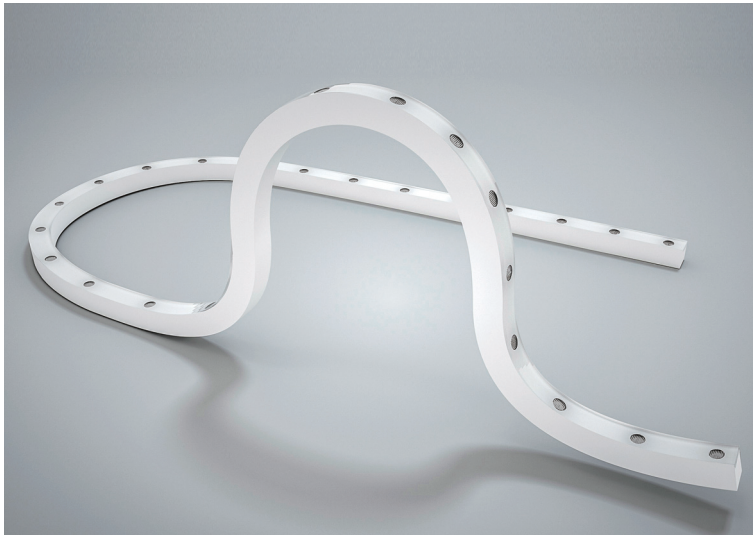

Dimension

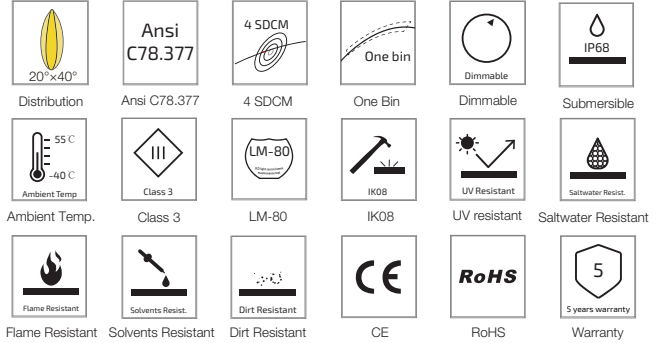

Optional LENS Distribution

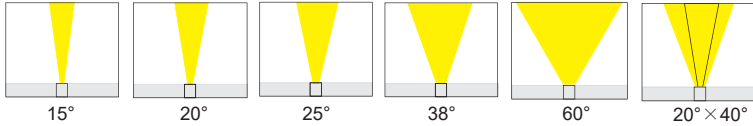


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	18W/m
Physical	
LED Count	24 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	250 mm
Mini. Curvature Radius:	250mm
Output	
LED Light	SMD LED 3535
CRI	>80
Max. Length	5M
Optional Lens	15°, 20°, 25°, 38°, 60°, 20° x 40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68

Optional Color

	2200K(2238±102K)
	2700K(2725±145K)
	3000K(3045±175K)
	3500K(3465±245K)
	4000K(3985±275K)
	4500K(4503±243K)
	5000K(5029±283K)
	6500K(6532±510K)
	Green(520-530nm)
	Blue (455-465nm)

Illuminance Distribution

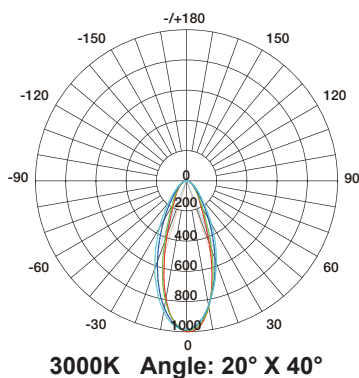

Height	Eavg, Emax	Diameter
3.281ft 1m	65.81, 92.86fc 708.3, 999.5lx	2.093ft 63.78cm
6.562ft 2m	16.45, 23.21fc 177.1, 249.9lx	4.185ft 127.56cm
9.843ft 3m	7.312, 10.32fc 78.70, 111.1lx	6.278ft 191.35cm
13.12ft 4m	4.113, 5.804fc 44.27, 62.47lx	8.37ft 255.13cm
16.4ft 5m	2.632, 3.714fc 28.33, 39.98lx	10.46ft 318.91cm

SFW20 Mono Color Silicone Flexible LED Wall Grazer

Connection

