






SFW20 SPI Pixel Chasing RGBW Silicone Flexible LED Wall Grazer

SFW20-24V-3535-24-SPI4-RGBW


Specification

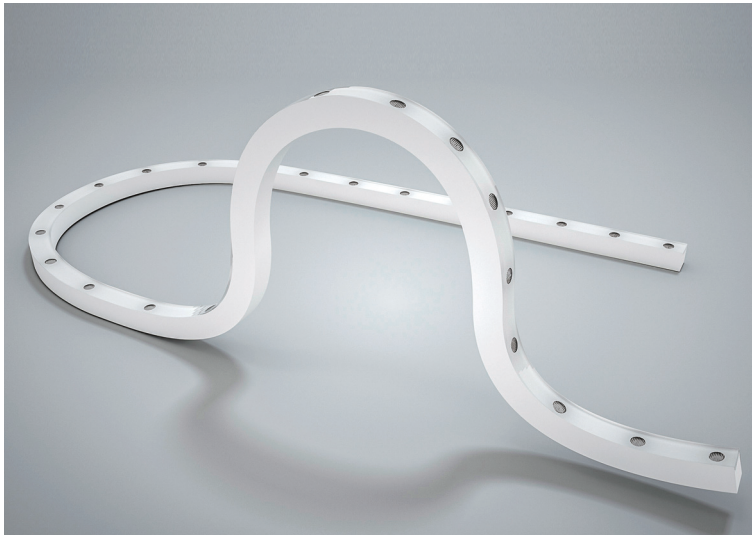

Dimension

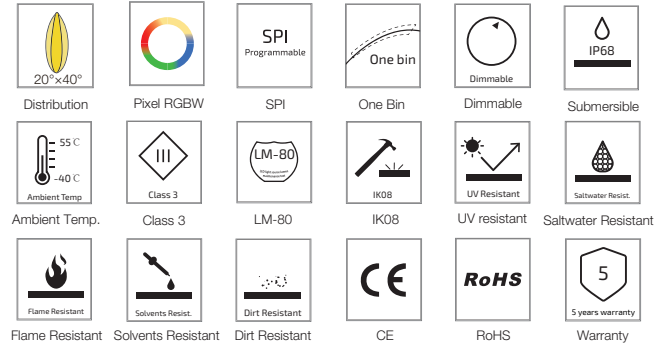

Optional LENSs Distribution

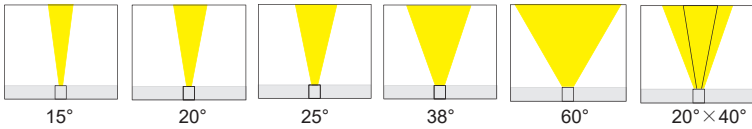


Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	23W/m
Physical	
LED Count	24 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	250mm
Minimum Bend Diameter	250mm
Output	
LED Light	SMD LED 3535
Color	RGBW(2200K/3000K/4000K/5000K)
Working Mode	SPI
Pixels Quantity	4 Pixels/m
IC Chips	8904
Max. Length	5M
Optional Lens	15°, 20°, 25°, 38°, 60°, 20°x40°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C

Emitting Color	Lumen Output
Red	88lm/m
Green	248lm/m
Blue	138lm/m
3000K	188m/m

Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68

Illuminance Distribution

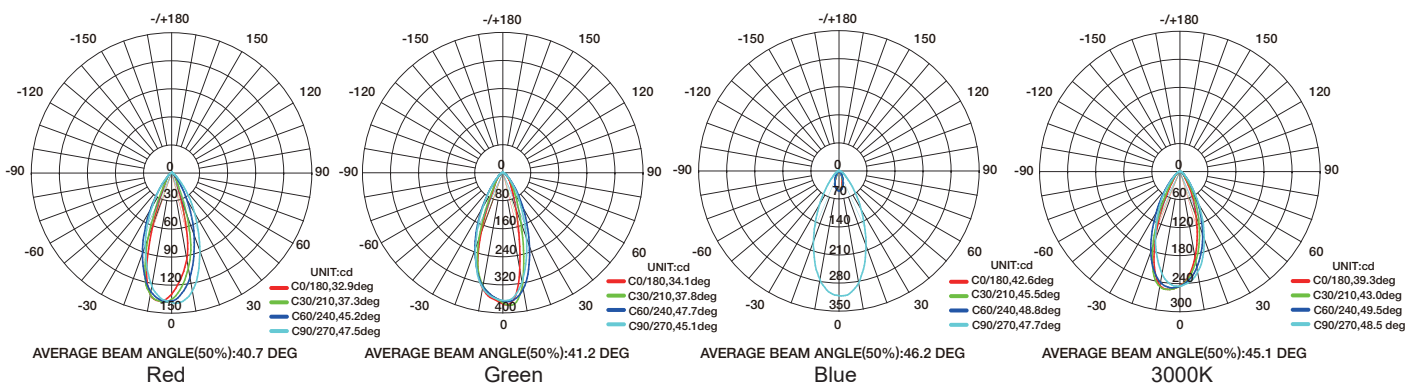

SFW20 SPI Pixel Chasing RGBW Silicone Flexible LED Wall Grazer

