


SP01 Mono Color Silicone LED Strip Light

SP01-24V-2835-120-2200K-6500K



Specification

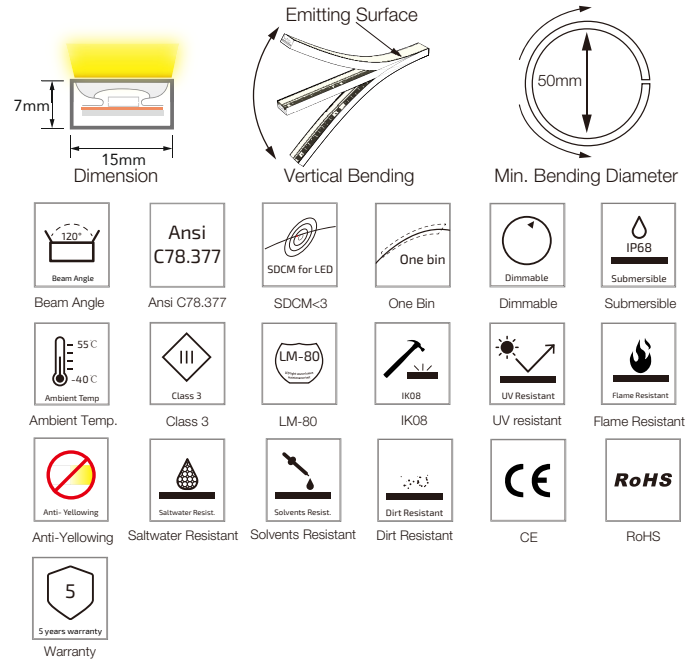


Technical Parameters

Electrical	Optional Color	Lumen Output
Input Voltage	2200K(2238±102K)	930lm/m
Power Consumption	2700K(2725±145K)	930lm/m
Physical		
LED Count	3000K(3045±175K)	953lm/m
Cutting Unit	3500K(3465±245K)	953lm/m
Cutting Unit Length	4000K(3985±275K)	970lm/m
Minimum Bend Diameter	5000K(5029±283K)	970lm/m
Output		
LED Light	5700K(5669±355K)	990lm/m
CRI	6500K(6532±510K)	990lm/m
Max Run Length*	Green(520-530nm)	230lm/m
Single Feed	Blue (455-465nm)	40lm/m
Double Feed	Lemon Yellow(570-580nm)	300lm/m
Beam Angle	Pink(610-620nm)	180lm/m
Lumen Maintenance		
70,000 Hours L70 @ 25°C		
50,000 Hours L70 @ 50°C		
Temperature Ranges		
Installation		
0°C to 50°C		
Operating		
-40°C to 55°C		
Dependability		
Warranty		
5 Years Warranty		
IP Rating		
IP68		

Illuminance Distribution

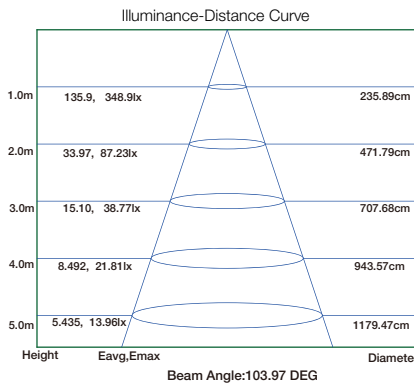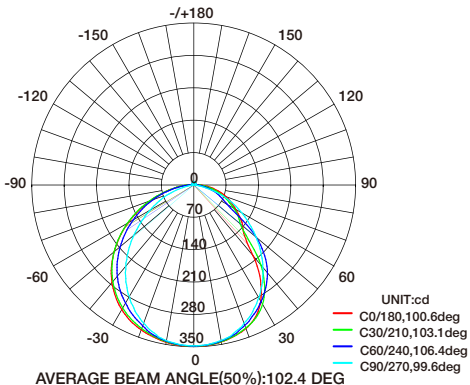

White Color Charts

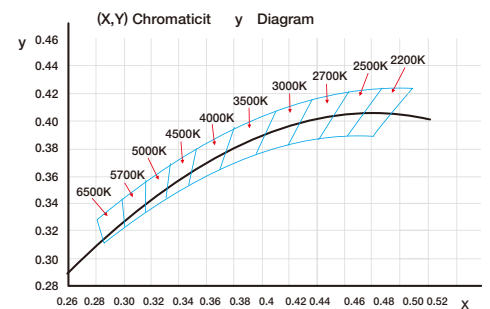

SP01 Mono Color Silicone LED Strip Light

Connection

