


SP01 Multi Color RGBW Silicone LED Strip Light



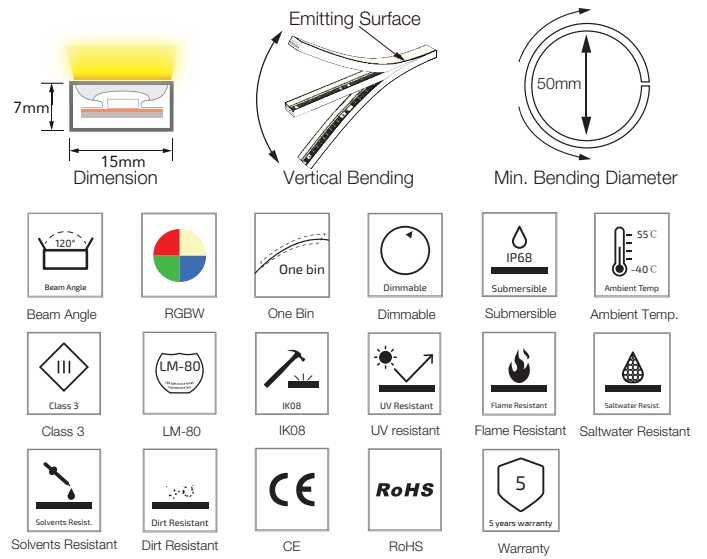

SP01-24V-5050-60-RGBW

Specification




Technical Parameters

Electrical	
Input Voltage	24V DC
Power Consumption	17W/m
Physical	
LED Count	60 LEDs/m
Cutting Unit	6 LEDs
Cutting Unit Length	100mm
Minimum Bend Diameter	50mm
Output	
LED Light	Epistar SMD LED 5050
Color	RGBW(2700K/3000K/4000K/5000K)
Max Run Length*	
Single Feed	8M
Double Feed	16M
Beam Angle	120°
Lumen Maintenance	70,000 Hours L70 @ 25°C 50,000 Hours L70 @ 50°C
Temperature Ranges	
Installation	0°C to 50°C
Operating	-40°C to 55°C
Dependability	
Warranty	5 Years Warranty
IP Rating	IP68

Emitting Color	Lumen Output
 Red	82lm/m
 Green	287lm/m
 Blue	571lm/m
 RGBW	758lm/m
 3000K	380lm/m

Illuminance Distribution

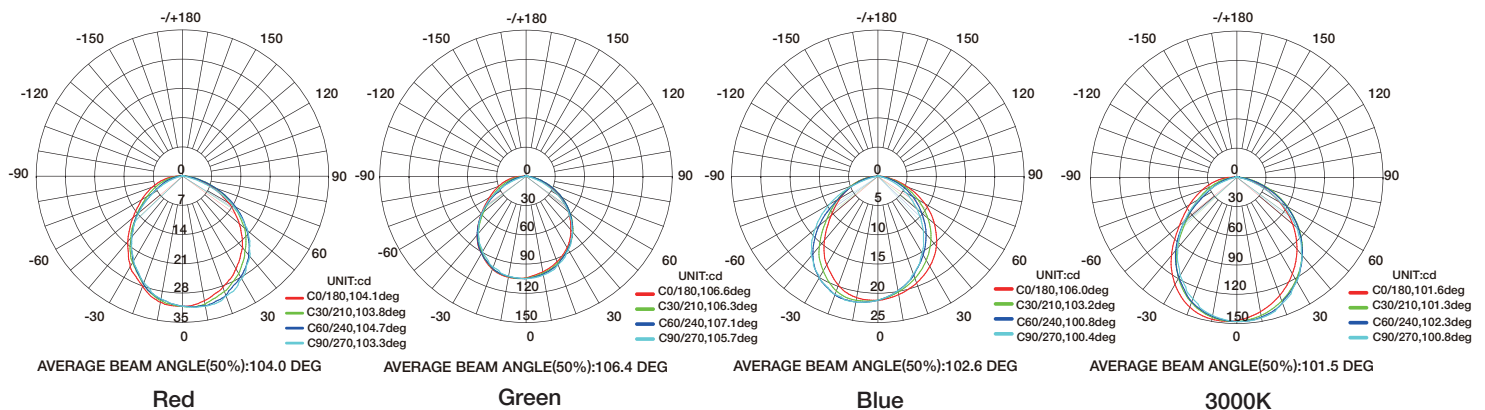

SP01 Multi Color RGBW Silicone LED Strip Light

Connection

